


## DS-2CD2012-I(1.3MP)/DS-2CD2032-I(3MP)


### IR Mini Bullet Network Camera

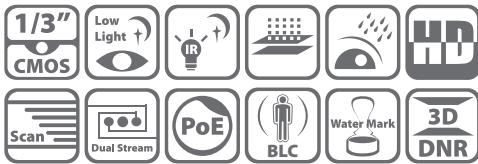

#### Key features

- 1.3MP / 3MP high resolution
- HD real-time video
- 3D DNR & DWDR & BLC
- IR LEDs: up to 30m
- IP66
- PoE
- Compact design
- Bracket included

#### Dimensions

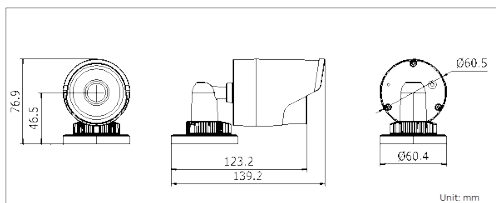

#### Available models

DS-2CD2012-I, DS-2CD2032-I

	DS-2CD2012-I	DS-2CD2032-I
<b>Camera</b>		
Image sensor	1/3" progressive scan CMOS	
Min. illumination	0.01 lux @F1.2, AGC ON, 0 lux with IR	0.07 lux @F1.2, AGC ON, 0 lux with IR
Shutter time	1/25s (1/30s) ~ 1/100,000s	
Lens	4mm@ F2.0 (6mm, 12mm optional)	4mm@ F2.0 (6mm, 12mm optional)
	Angle of view: 73.1°(4mm), 46°(6mm), 22°(12mm)	1920 × 1080:Angle of view: 79°(4mm), 49°(6mm), 23.2°(12mm) 2048 × 1536: Angle of view: 70°(4mm),43.3°(6mm), 20.6°(12mm)
Lens mount	M12	
Day & night	IR cut filter with auto switch	
Digital noise reduction	3D DNR	
Wide dynamic range	Digital WDR	
<b>Compression Standard</b>		
Video compression	H.264 / MJPEG	
H.264 codec profile	Main profile	
Bit rate	32 Kbps ~ 16 Mbps	
Dual stream	Yes	
<b>Image</b>		
Max. Image Resolution	1280 × 960	2048 × 1536
Frame rate	50 Hz: 25 fps (1280 × 960), 25 fps (1280 x 720), 25 fps (704 x 576), 25 fps (640 x 480) 60 Hz: 30 fps (1280 × 960), 30 fps (1280 x 720), 30 fps (704 x 576), 30 fps (640 x 480)	50Hz: 20fps (2048 x 1536), 25fps (1920 × 1080), 25fps (1280 x 720) 60Hz: 20fps (2048 x 1536), 30fps (1920 × 1080), 30fps (1280 x 720)
Image settings	Rotate mode, Saturation, brightness, contrast, sharpness adjustable through client software or web browser	
BLC	Yes, zone configurable	
ROI	Yes, up to 4 configurable areas	
<b>Network</b>		
Network storage	NAS	
Alarm trigger	Motion detection, tampering alarm	
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IP v6, Bonjour	
System compatibility	ONVIF, PSIA, CGI, ISAPI	
General functionalities	User Authentication, watermark, reset button	
<b>Interface</b>		
Communication interface	1 RJ45 10 M / 100 M Ethernet interface	
Reset Button	Yes	
<b>General</b>		
Operating conditions	-30 °C ~ 60 °C (-22°F ~ 140 °F) humidity 95% or less (non-condensing)	
Power supply	12 VDC ± 10% , PoE (802.3af)	
Power consumption	Max. 5W (max. 7W with ICR on)	
Weather proof rating	IP66	
IR range	Up to 30m	
Dimension	60.4×76.9×139.28 mm (2.4" × 3.0" × 5.5")	
Weight	500g (1.1 lbs)	